


STANDARD MALE 115V PLUG ON THIS END *

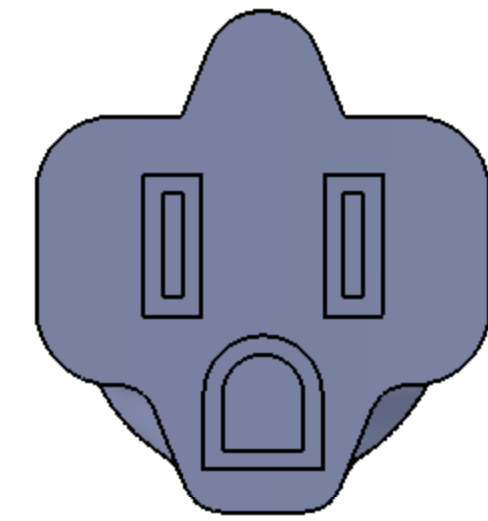

STANDARD FEMALE 115V SOCKET ON THIS END *

STANDARD CORD LENGTH IS 2 FEET *

STANDARD CORD LENGTH IS 2 FEET *


* CUSTOM CORD LENGTH AND OPTIONAL PLUGS AND SOCKETS AVAILABLE AT ADDITIONAL COST

@60Hz FREQUENCY

Power Rating	Model	Diameter		Depth		Weight		Inserts		MOUNT		
		In.	mm	In.	mm	Lbs	Kg	Thread #	Distance	X	Y	Z
300 VA	IP-300/60	5 1/8	130	2 3/4	70	8.5	3.9	10-24	1.00"	3"	.34"	1.19"
400 VA	IP-400/60	5 1/8	130	2 3/4	70	8.5	3.9	10-24	1.00"	3"	.34"	1.19"
600 VA	IP-600/60	6 5/8	168	2 3/4	70	13	5.9	1/4-20	1.25"	4"	.54"	1.47"
800 VA	IP-800/60	6 5/8	168	2 3/4	70	13	5.9	1/4-20	1.25"	4"	.54"	1.47"
1000 VA	IP-1000/60	8 1/4	210	3	76	20	9.1	1/4-20	1.50"	5"	.62"	1.7"
1200 VA	IP-1200/60	8 1/4	210	3	76	22	10	1/4-20	1.50"	5"	.62"	1.7"
1500 VA	IP-1500/60	8 1/4	210	3	76	25	11.5	1/4-20	1.50"	5"	.62"	1.7"
2200 VA	IP-2200/60	8 1/4	210	4	102	32	14.5	1/4-20	1.50"	5"	.62"	1.7"
3000 VA	IP-3000/60	9	230	4 1/4	108	38	17.3	1/4-20	1.50"	5"	.62"	1.7"

@50/60Hz FREQUENCY

Power Rating	Model	Diameter		Depth		Weight		Inserts		MOUNT		
		In.	mm	In.	mm	Lbs	Kg	Thread #	Distance	X	Y	Z
350 VA	IP-350/60	5 1/8	130	2 3/4	70	8.5	3.9	10-24	1.00"	3"	.34"	1.19"
650 VA	IP-650/60	6 5/8	168	2 3/4	70	15	6.8	10-24	1.00"	3"	.34"	1.19"
1000 VA	IP-1000/50	8 1/4	210	3	76	22	10	1/4-20	1.50"	5"	.62"	1.7"
1200 VA	IP-1200/50	8 1/4	210	3	76	25	11.5	1/4-20	1.50"	5"	.62"	1.7"
1800 VA	IP-1800/50	8 1/4	210	4	102	32	14.5	1/4-20	1.50"	5"	.62"	1.7"
2500 VA	IP-1200/50	9	230	4 1/4	108	38	17.3	1/4-20	1.50"	5"	.62"	1.7"

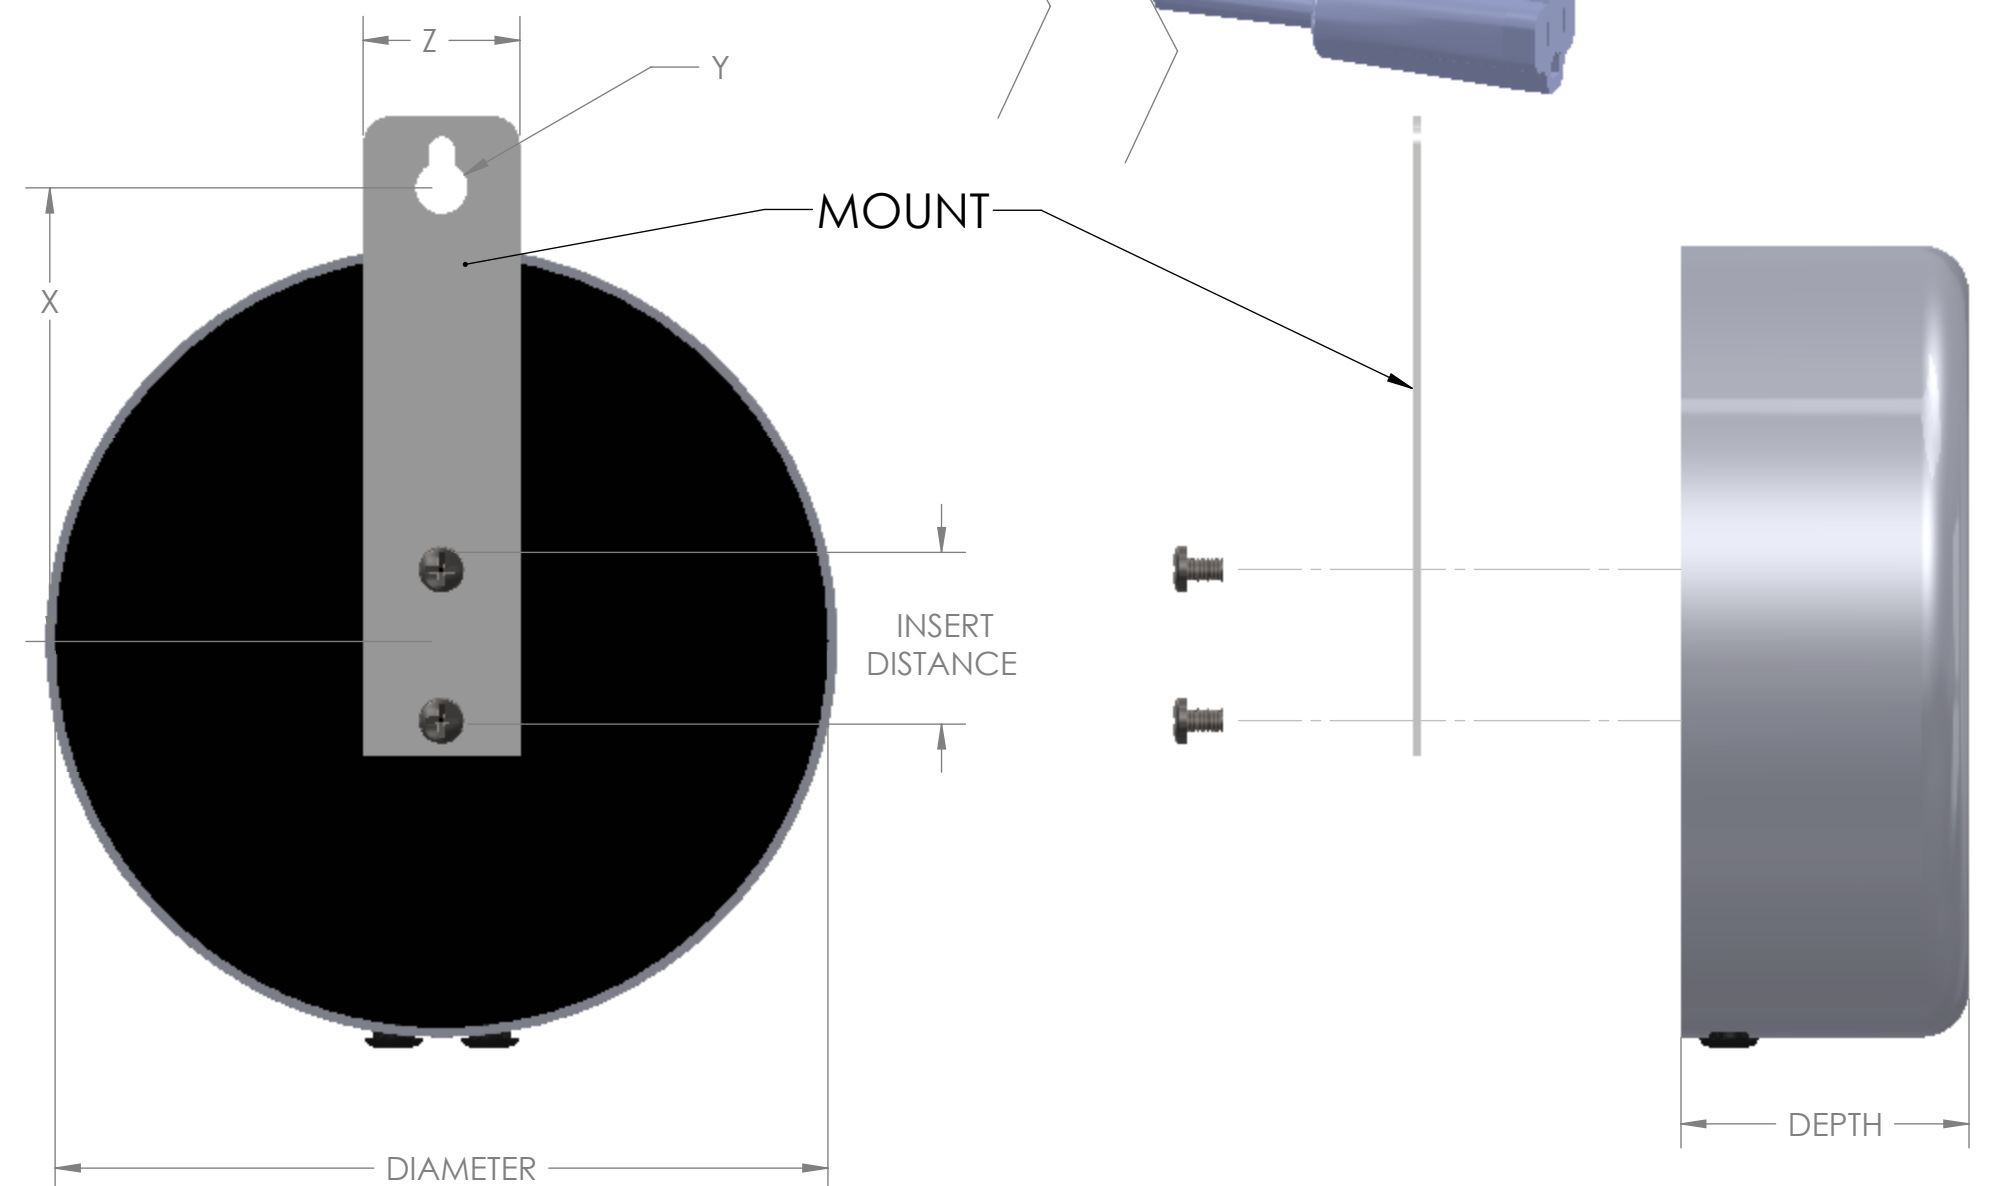

Certifications : UL and CSA Standards, IEC and EN Directives, CE Marking

The transformers are certified to medical Safety Standards UL60601- and CSA STD c22.2 No. 601.1. The design guarantees maximum 50-uA leakage current, well below the legal requirement of maximum 100 uA as specified by the NEC (National Electric Code) and UL60601-1. The 50/60Hz models are certified to IEC60601-1 and EN61558-1 with CE marking.

BRIDGEPORT
MAGNETICS GROUP, INC.
 6 Waterview Drive Shelton Ct. 06484 USA 203.954.0050
 Toll Free 800.836.5920 Fax 203.954.0051 WWW.BRIDGEPORTMAGNETICS.COM