


IEC 60320 C-13 Connector
For 15A 250V / 10 A 250V
Green LED indicates power on



Hospital Grade Plug
NEMA 5-15P
molded on 2 foot
power cord
For 15A 120V

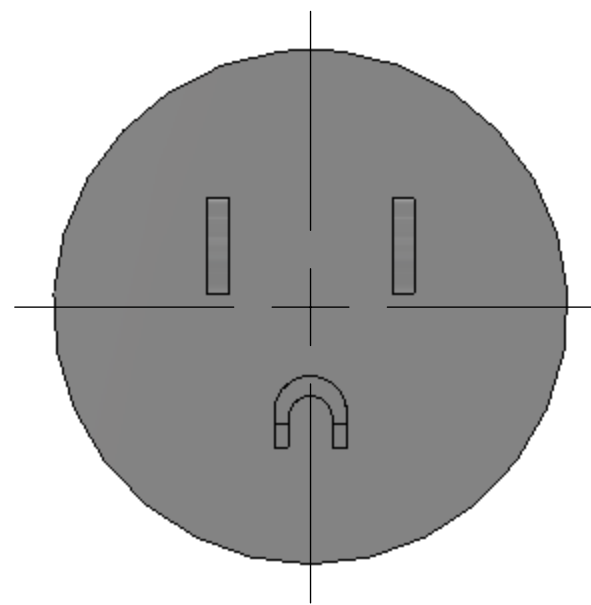

60Hz FREQUENCY

Power Rating	Model	Diameter		Width		Weight	
		In.	mm	In.	mm	Lbs	Kg
400 VA	IP11-400/60	5 3/4	130	2 3/4	70	8.5	3.9
800 VA	IP11-800/60	6 5/8	168	2 3/4	70	13	5.9
1200 VA	IP11-1200/60	8 1/4	210	3	76	22	10

50 / 60Hz FREQUENCY

Power Rating	Model	Diameter		Width		Weight	
		In.	mm	In.	mm	Lbs	Kg
350 VA	IP11-350/50	5 1/8	130	2 3/4	70	8.5	3.9
650 VA	IP11-650/50	6 5/8	168	2 3/4	70	13	5.9
1000 VA	IP11-1000/50	8 1/4	210	3	76	22	10

Certifications : UL and CSA Standards, IEC and EN Directives, CE Marking, CB Report

The transformers are certified to medical Safety Standards UL60601- and CSA STD c22.2 No. 601.1. The design guarantees maximum 50-uA leakage current, well below the legal requirement of maximum 100 uA as specified by the NEC (National Electric Code) and UL60601-1. The 50/60Hz models are certified to IEC60601-1 and EN61558-1 with CE marking.

